

ETNYRE

Chipspreaders

Built to be the best



Etnyre®

Etnyre offers more



Front wheel drive ChipSpreader
with standard spread hopper



ChipSpreader with four wheel drive and
variable width spread hopper



- More capacity,
- More control,
- More productivity,
- More dependability.
- Front wheel or four wheel drive



Folding Bat Wing Rear Receiving Hopper provides increased aggregate capacity and easy clean out of hopper. Facilitates easy change of aggregate types.



Computer maintains a uniform aggregate application even during changes in road speed. Stores five different application rates.



Individual gate controls on standard and variable width hoppers offer variable spread width operated from a remote operators panel.




Control Panel provides clear view and easy control. Change from forward to reverse with one hand without clutching.



Sliding operator station provides the visibility and control to increase operating efficiency and reduce fatigue. Available with manual or powered control.

Computer controlled accuracy and the legendary Etnyre commitment to customer satisfaction.

- *Efficient hydrostatic planetary drive. Front wheel or four wheel drive.*
- *Powerful diesel engine standard, additional diesel engine models to choose from.*
- *Change spread width on the move with the exclusive Etnyre variable width spread hopper.*
- *Seamless speed control zero to full travel speed.*

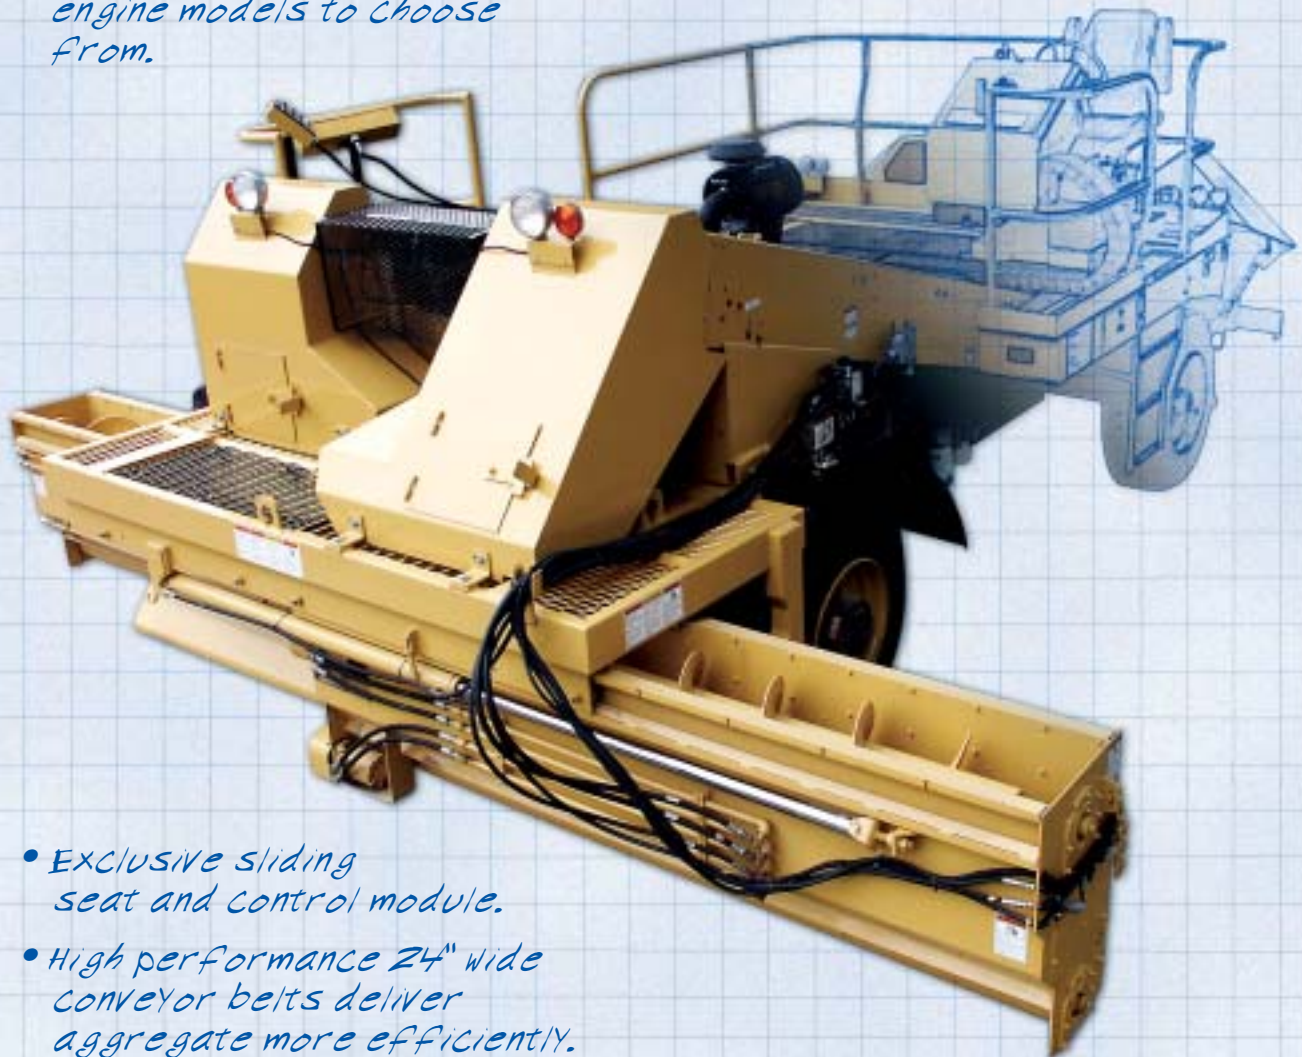

- *Exclusive sliding seat and control module.*
- *High performance 24" wide conveyor belts deliver aggregate more efficiently.*
- *Folding Bat Wing Rear receiving hopper provides increased aggregate capacity and easy clean out of hopper.*
- *Exclusive Etnyre switch-on-the-go truck hitch.*
- *Dependable planetary axle with service brakes.*

Change spread width on the move.



Exclusive Etnyre Variable Width Spread Hopper.

- **No parts to add or subtract.**
- **One pass capability to 24' wide.**
- **No extra hopper extending beyond the spread width.**
- **Unbeatable transportation convenience.**

The variable width hopper hydraulically extends and retracts while spreading to cover the entire road and shoulder in one pass. Width is adjusted with a switch. Controls are located at both the driver's seat and in a mobile control panel located at the right front station.

Two independent spread hoppers. Width is variable on the left side, right side, or both sides at once.

The hoppers retract with the flip of a switch. Ready for transport only seconds after finishing a job. No need to empty hoppers or remove parts.

Individual one foot power gates give the variable hopper flexibility and increased productivity.

Available in four sizes:

- 9'/18' System, spreads 1' to 18'
- 10'/20' System, spreads 1' to 20'
- 11'/22' System, spreads 1' to 22'
- 12'/24' System, spreads 1' to 24'





E. D. Etnyre & Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice. Photos and illustrations contain standard and optional equipment.

Request the following items for more information about Etnyre ChipSpreaders:

- A-208-** Component Brochure
- A-202-** Hydrostatic ChipSpreader Features
- V-201-** Etnyre Hydrostatic Chipspreaders Video



Distributed by:



E. D. ETNYRE & CO.
 1333 S. Daysville Road, Oregon, Ill 61061
 Phone 1-815-732-2116, Fax 815-732-7400,
www.etnyre.com

L-202-05
 Supersedes L-202-03R