


Bituminous Pumps

Etnyre®


Model P-200



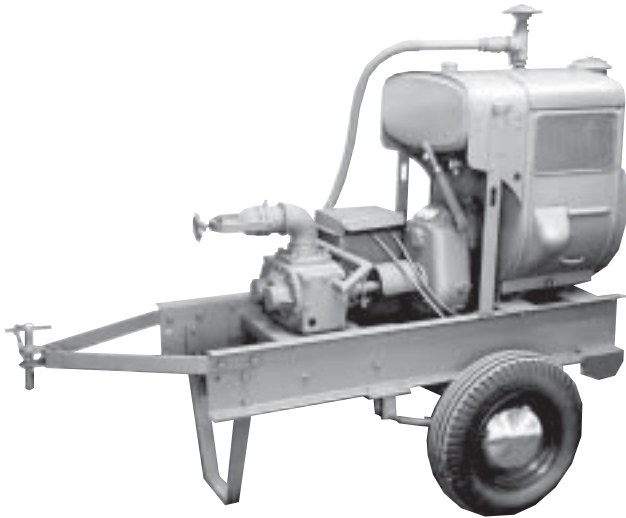


Trailer Mounted with exhaust heated Etnyre P-200, 3" bituminous material pump with relief valve, Wisconsin Model VH-4D four cylinder air cooled gasoline engine (manufacturers maximum rating - 30 H.P.), complete with 12 V. starter, alternator and battery. Two 3" Etnyre quick couplers, towing tongue, 2,000 lb. axle on springs, 4.50-12, 4 ply rating tires. Weight, 1,100 lbs. uncrated.

Skid Mounted unit also available less transportation assembly. Weight, 950 lbs.

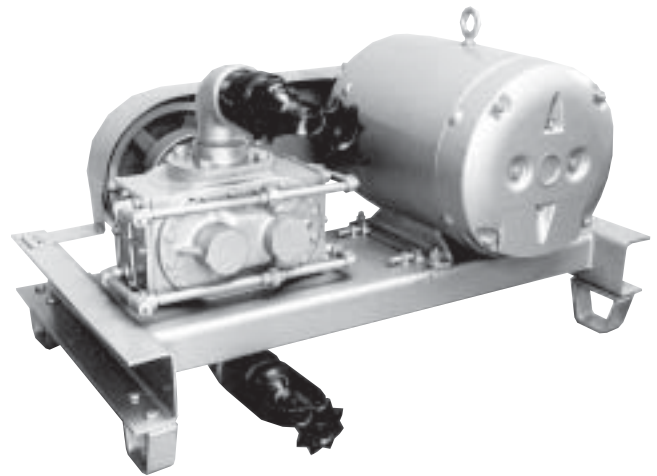


Skid Mounted with Etnyre P-200 steam/hot oil jacketed bituminous pump with relief valve. 15HP 1200 RPM 230/460 volt, 3 phase 60 cycle Electric Motor, four V-belt drive, heavy duty steel frame, 3" piping with two Etnyre quick couplers. Weight, 900 lbs. uncrated.

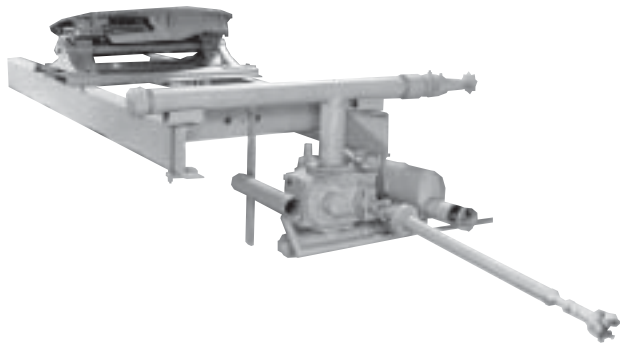

Tractor Mounted with exhaust heated Etnyre P-200 pump with relief valve, 3" piping and two Etnyre quick couplers. It only includes installation and does *not* include truck Power Take-Off. P.T.O. for truck installation price on application.

PERFORMANCE CURVE

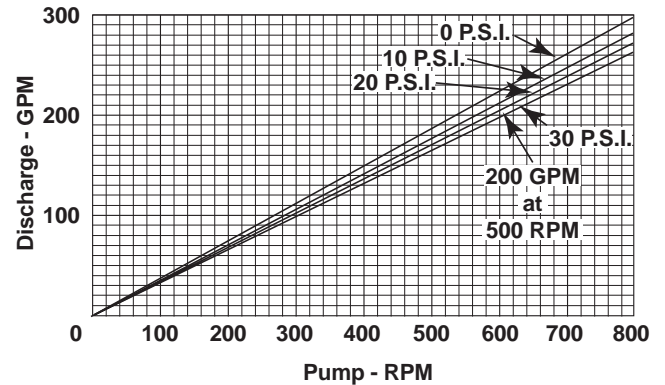

Pump Specifications: Steel construction with two 9 tooth spiral impellers. 3" top and bottom outlet ports. Chrome nickel steel shafts, heat treated and ground, running in four bronze bearings. Split packing gland for easy service. Pump ends manifolded for heating.

Photos and illustrations contain standard and optional equipment.

E.D. Etnyre & Co., whose policy is one of continuous improvement. reserves the right to change specifications without notice.



E. D. ETNYRE & CO. 1333 South Daysville Road Oregon, Illinois 61061
 Phone 1-800-995-2116 Fax: 815-732-7400 Web Site: www.etnyre.com E mail: sales@etnyre.com

LITHO IN U.S.A. L-601-99