

# BLACKHAWK

**LIMITED Series**

Heavy Duty  
Trailers




# LIMITED Series

# BLACKHAWK

Removable Gooseneck Trailers

• 35 tons • 50/55 tons

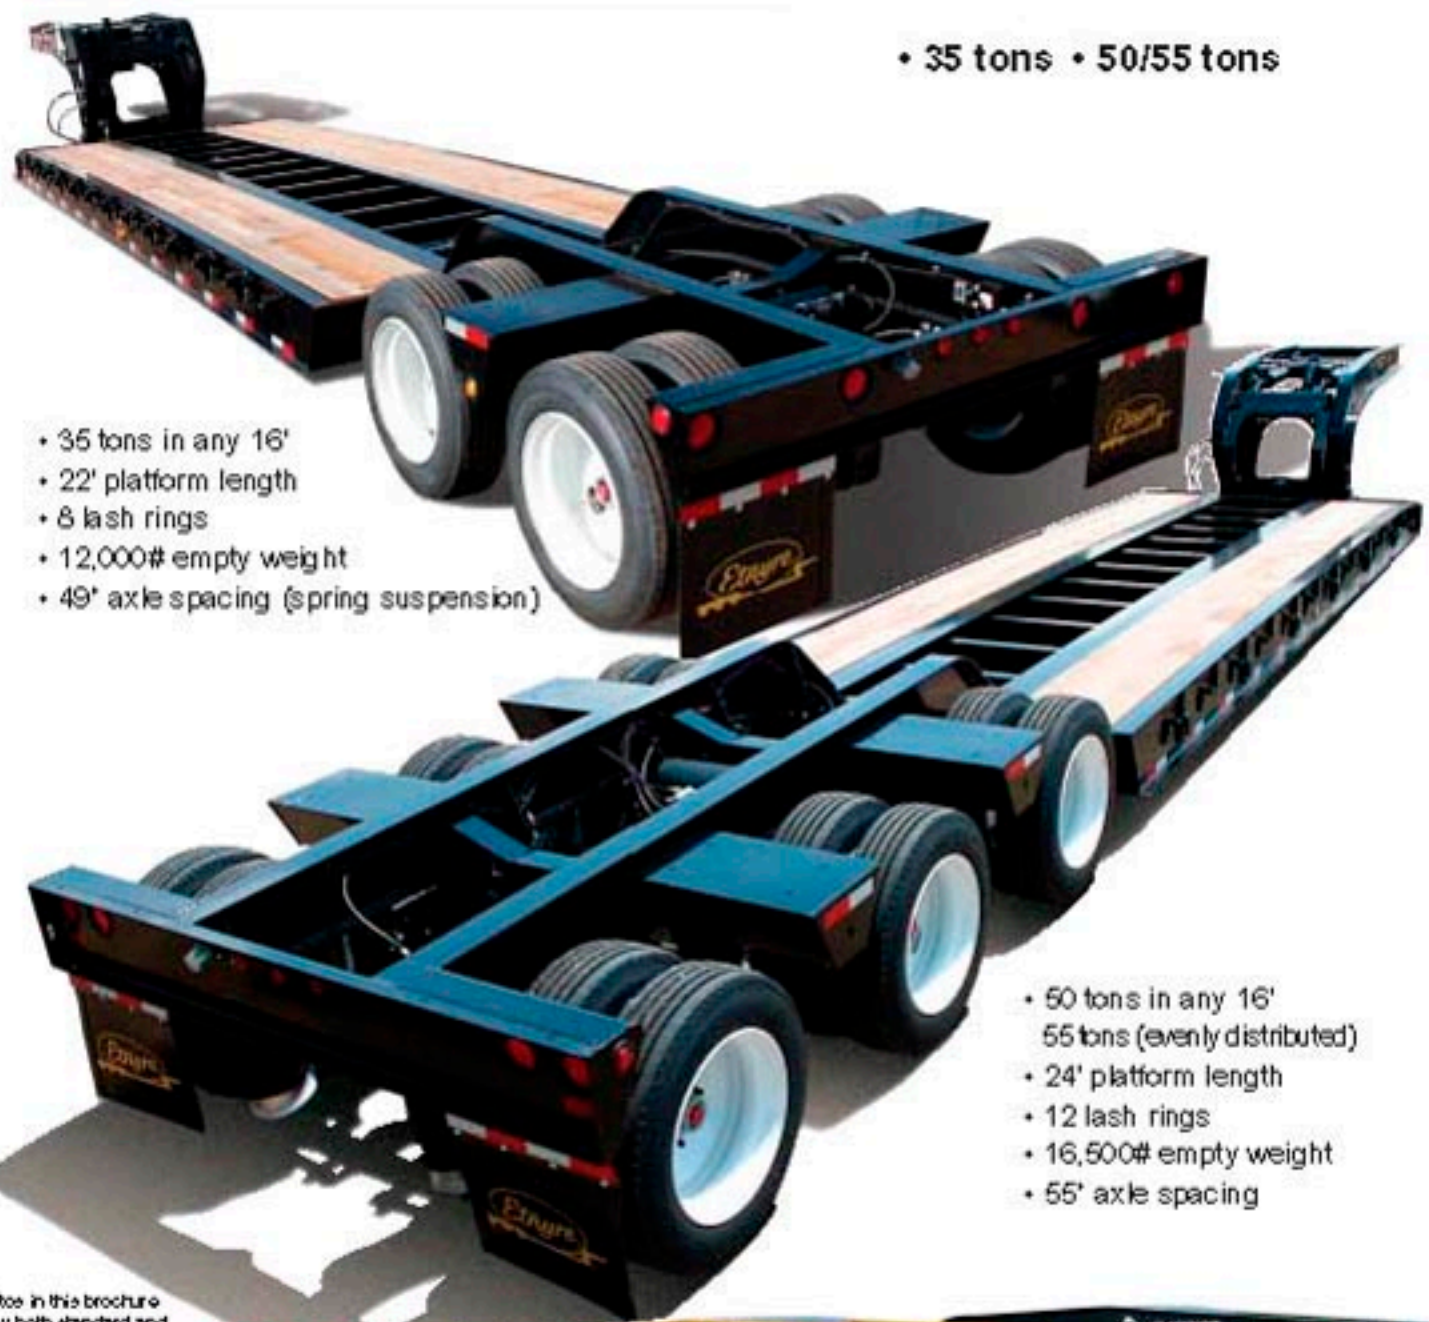

- 35 tons in any 16'
- 22' platform length
- 8 lash rings
- 12,000# empty weight
- 49' axle spacing (spring suspension)

- 50 tons in any 16'
- 55 tons (evenly distributed)
- 24' platform length
- 12 lash rings
- 16,500# empty weight
- 55' axle spacing

Photos in this brochure show both standard and optional equipment.



- Two part urethane paint; standard colors black, red or yellow

Due to printing restrictions the colors shown are representative only.

# Quality and performance In an economical package.



Gooseneck Support Arm

- 8' 6" wide platform, four beam T-1 construction
- 22" deck height, 6" road clearance
- 24" cross member spacing
- Hydraulic Hi-Lift non ground engaging gooseneck – wet line
- Hydraulic gooseneck support arm
- Adjustable fifth wheel height (48"–50"–52")
- 84" swing clearance (maximum)
- Lash rings
- Apitong decking (1-1/2")
- Air brakes
- Axles 22,500#
- Tires – 255/70R 22.5 (H)
- Air Ride suspension or multi-leaf spring
- Two part urethane paint; black, red or yellow

Shown with optional bolt on aluminum gooseneck cover and center deck.



Flat style lash rings and outriggers



Gooseneck lock pin



Simple one hand adjustment of deck height and or fifth wheel settings. No doors, shims or spacers.



High lift gooseneck. Higher lifting capacity and more travel (above and below ground level) than any of it's competitors.



Rear section with spring suspension.



Simple, quick and easy hook-ups to any tractor, electrical and hydraulic system.



Optional gravel guard and optional fixed front ramps.



Optional battery and flasher kit

## Limited options available contact factory!

*E. D. Etryre & Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice. Some items shown in photos and illustrations may be optional equipment.*

Distributed By:



**E. D. ETNYRE & CO.,**  
 1333 South Daysville Road, Oregon, Illinois 61061  
 Phone: 800-995-2116 or 815-732-2116 • Fax 815-732-7400  
 Web Site: [www.etryre.com](http://www.etryre.com) • Email: [sales@etryre.com](mailto:sales@etryre.com)  
 ISO9001:2000 certified

Litho in U.S.A. L-LTD-06