S-MRG-16
October 2016

SPECIFICATIONS

30/35/40 ton Trailer

ETNYRE MRG SERIES MECHANICAL REMOVABLE GOOSENECK
MRG30/35/40

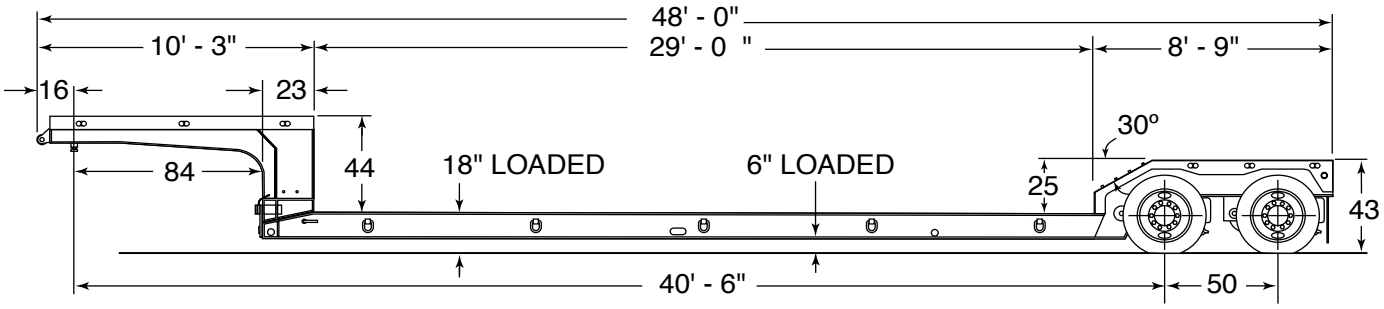

MRG30/35TD

30 and 35 ton
(in any 16'-0" of deck)

Mechanical removable gooseneck front loading trailer
Full width gooseneck platform with 1 1/2" Apitong
Six (6) slot type tie downs on gooseneck platform
Swing-A-Way stirrups (tear drops)
Pin setting - 16"
Swing clearance - 84"
Fifth wheel height - 50" loaded
Concentrated load in 16'-0"
Main frame - 4 beam design - 12" fully cambered
100,000 PSI yield strength steel construction
8" I Beam crossmembers on 24" centers
Positive gooseneck locking pin (viewable from tractor)
Deck height - 18" loaded
Ground clearance - 6" loaded
Deck width - 8'-6" (102")
Top flange reinforcement - front slope
Decking - 1 1/2" Apitong (butt joint)
Deck securement - deck screws
Outriggers - None

Full width rear load deck (platform), traction bars on slope.
1 1/2" Apitong full width
Six (6) slot type tie downs on rear platform
Ridewell air suspension
Manual exhaust valve
Tires - (8) 255/70R 22.5 (H), 16 PR tubeless radials
Hubs - Hub piloted with outboard drums
Wheels - (8) 8.25 x 22.5 steel disc (white)
Axles - 22,500 pounds with oil bearings
Axle spacing - 50"
Anti-Lock brakes (2S/2M System) .
Brakes - 16 1/2" x 7" air
Spring brakes - one (1) axle (rear axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lashing rings - 10 (5 each side)
Mud flaps
Red and white conspicuity markings

E. D. ETNYRE & CO. 1333 S. Daysville Road, Oregon, Illinois 61061 Phone: 815/732-2116
Fax: Sales 815-732-7400 email: sales@etnyre.com www.etnyre.com