




SPECIFICATIONS

Fixed Gooseneck Paver Special Trailer

ETNYRE PS SERIES PAVER SPECIAL R25/35/40/50TL

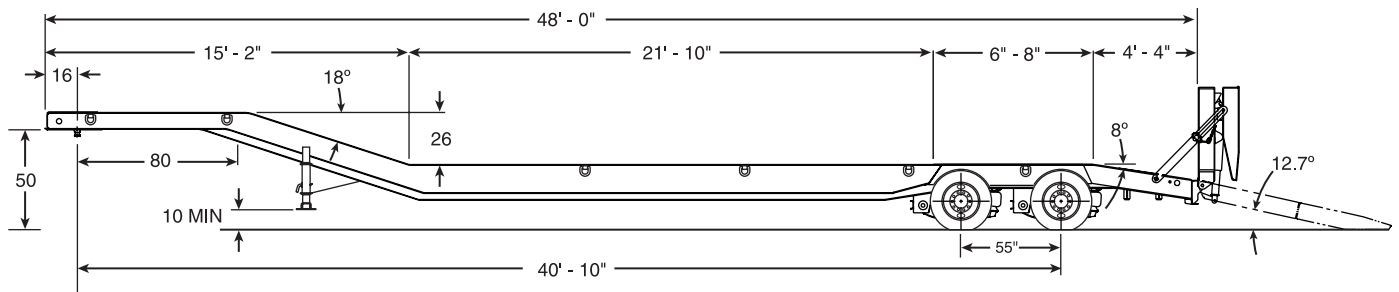

General:	48'-0" Overall length. Level platform (deck). Concentrated load in 16'-0". Telescopic drop legs. Covered wheel wells - 1/4" steel floor plate
Gooseneck Type:	Fixed (rigid) gooseneck. Full width gooseneck. Pin setting - 16". 3:1 Gooseneck slope (18°)
Swing clearance:	80" radius
Fifth wheel height:	50" loaded
Main frame:	Two (2) beam design. 100,000 P.S.I. steel mainbeams
Crossmembers:	One (1) piece crossmembers on 24" centers
Deck height:	33" loaded
Deck width:	8'-6" (102")
Decking:	1 1/2" Apitong, full width. Deck secured with deck screws.
Ramps:	Hydraulic bi-fold ramps (8'-0" x 36"). 12 Volt electric-hydraulic power package. 4'-4" (52") sloping afterdeck/wood covered
Suspension:	Air ride suspension. Manual air exhaust
Tires:	215/75R 17.5 (H) 16 PR tubeless radials
Wheels:	6.75 x 17.5 steel disc (white). Hubs - hub piloted
Anti-Lock brakes:	(2S/2M System)
Brakes:	Brakes - 12 1/4" x 7 1/2" full air. Spring brakes - one (1) axle (rear axle). Automatic slack adjusters
Axles:	22,500 pounds with oil bearings
Lighting:	L.E.D. type - rubber mounted - mid turn signal
Air lines:	Glad hands
Electrical:	7 way receptacle
Lashing rings:	14 (7 each side/bent style)
Mud flaps	
Finish:	Shot blast / epoxy primer / urethane finish. Red and white conspicuity markings